


Flat Panel Speaker System
Dual sided Plane wave speaker

FB-6002-LW

FB-6002-HW High Impedance matching transformer installed type

※ This specification may be changed without a notice.

- Type : Dual sided speaker by a single amplifier
- Speaker Unit : FPS2030 Flat Speaker x 2
- Impedance : 4Ω 【※1】
: 170Ω (100V/60W)
: 330Ω (100V/30W)) 【※2】
: 670Ω (100V/15W)
- Input : 250W 【※1】
: 60W/30W/15W 【※2】
- Sound Pressure Level : 91dB at 1W 1m
- Frequency Responce : 250Hz - 10kHz (-10dB)
- Directional Charac. : Vertical 70° , Horizontal 20° (2kHz -6dB)
- Input Connector : 4-pin cable
- Pin Assign : Red(+), White(-) 【※1】
: Red (COM), Pink (170Ω)
: White (330Ω)、Translucent (670Ω)) 【※2】
- Cabinet : SPCC
- Mounting : M10 x 30 Stud Bolt x 4pcs
- Dimensions : W851 x H330 x D90 (mm)
- Weight : 14.5kg 【※1】
: 16.5kg 【※2】
- Color : Black (Standard color), Available for Custom colors
- Accessories : M8 eyebolt x 2, M10 nut / washer/ spring washer x 4

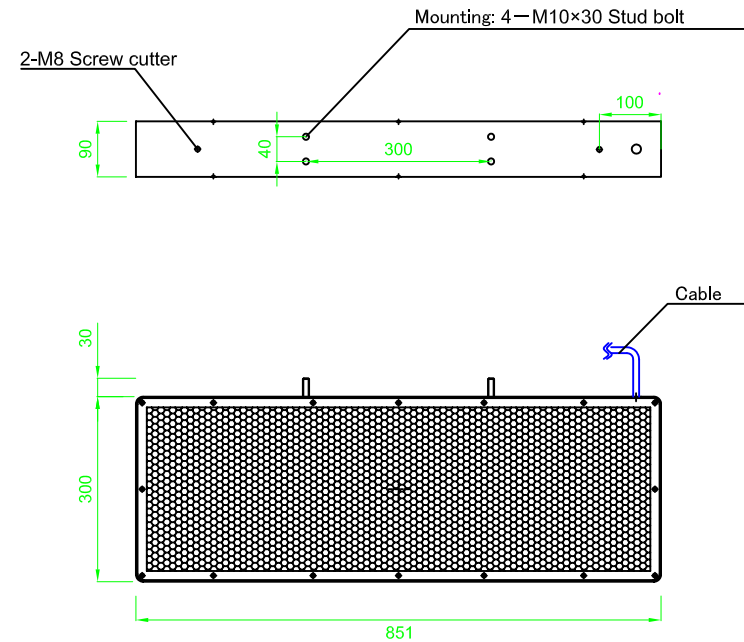

【※1】 FB-6002-LW

【※2】 FB-6002-HW

No. PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW.		Checked by	Approved by - date	File name	Date	Scale
FPS INC. 株式会社エフピーエス				FB-6002-LW/FB-6002-HW		
				Specification sheet		