




Pipeline Speaker

PL-2

Specifications

- Type : Full-range simple amp drive
- Speaker Unit : 2 flat units are connected
- Impedance : 12Ω
- Freq. range : 140Hz - 20kHz ±3dB
- SPL : 86dB at 1m 1W
- Rated Input : 15W continous
- Maximum Input : 30W continous
- Directional characteristics : Vertical 0°, Horizontal 110° (4kHz -3dB average)
- Input connector : NL-4MP (Neutrick)
- Cabinet : Aluminum cylindrical cabinet
- Hanging point : φ3/8 threaded hole on both the top and bottom
- Dimensions : φ75 × 316mm
- Net weight : 1.4kg
- Color : Black or Silver

※ This specification may change without notice.

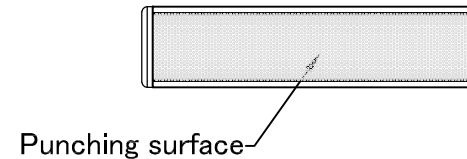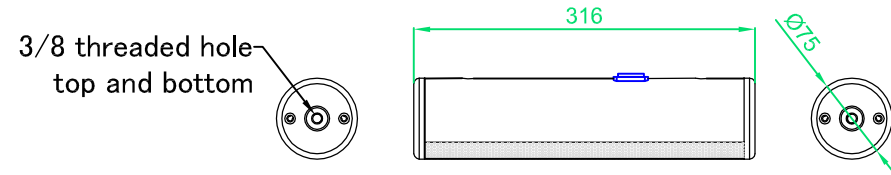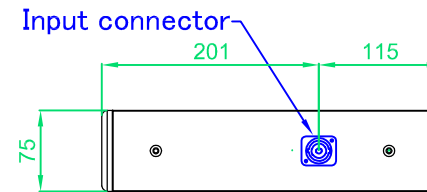

No. PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW. T.Yamaguchi	Checked by	Approved by - date	File name	Date	2010.5.31	Scale
FPS INC. 株式会社エフピーエス				Pipeline Speaker PL-2		
				Outline view, Specifications	Edition	Sheet