RevNo	Revision note	Date	Signature	Checked

Pipeline Speaker
PL—4

Specifications

Type	:	Full-range simple amp drive
Speaker Unit	:	4 flat units are connected
Impedance	:	6Ω
Freq. range	:	140Hz - 20kHz ±3dB
SPL	:	88dB at 1m 1W
Rated Input	:	30W continous
Maximum Input	:	60W peak
Directional	:	Vertical 0°, Horizontal 110°
characteristics	:	(4kHz -3dB average)
Input connector	:	NL-4MP (Neutrik)
Cabinet	:	Aluminum cylindrical cabinet
Hanging point	:	φ3/8 threaded hole on both the top and bottom
Dimensions	:	φ75 × 610mm
Net weight	:	2.3kg
Color	:	Black or Silver

※This specification may change without notice.

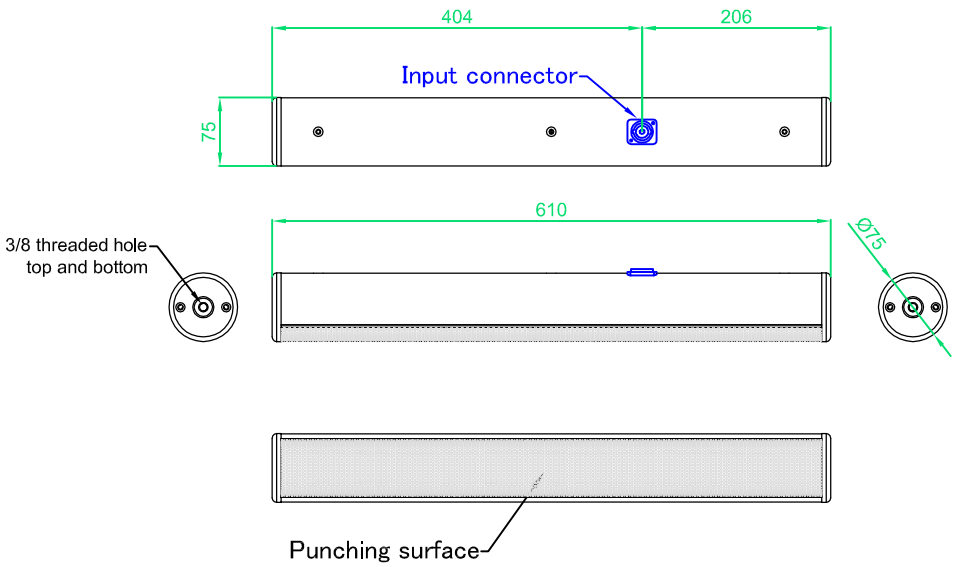

No.	PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW. T.Yamaguchi		Checked by	Approved by - date	File name	Date 2010.5.31	Scale
FPS INC. 株式会社エフピーエス		Pipeline Speaker PL-4				
		Outline view, Specifications			Edition	Sheet