


Pipeline Slim speaker PLS-2WP

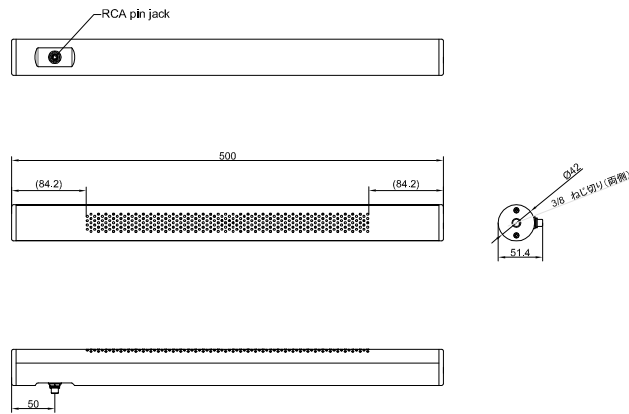

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Specifications

Speaker unit	: Full range single amp driven Linearray speaker units x4pcs connected
Impedance	: 4Ω
Frequency	: 210Hz - 10kHz ±3dB
SPL	: 82dB at 1m1w
Rated Input	: 20W constantly
Maximum Input	: 40W moment peak
Directional	: Vertical 30 degrees, Horizontal 220degrees (4kHz-6dB)
Input connector	: RCA pin jack
Cabinet	: Aluminium cylindrical type cabinet
Hanging point1	: 3/8 nut plates (up,down both)
Dimensions	: 500×Φ42mm (except terminal)
Weight	: 0.7 kg
Color	: Silver

※This specifications may change without notice.

No.	PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW. T.Yamaguchi	Checked by	Approved by - date	File name	Date	2016,5,19	Scale
FPS INC. 株式会社エフピーエス				Pipeline Slim speaker PLS-2WP		
				Outline drawing	Edition 02	Sheet