RevNo	Revision note	Date	Signature	Checked

Pipeline Slim speaker
PLS-4WP

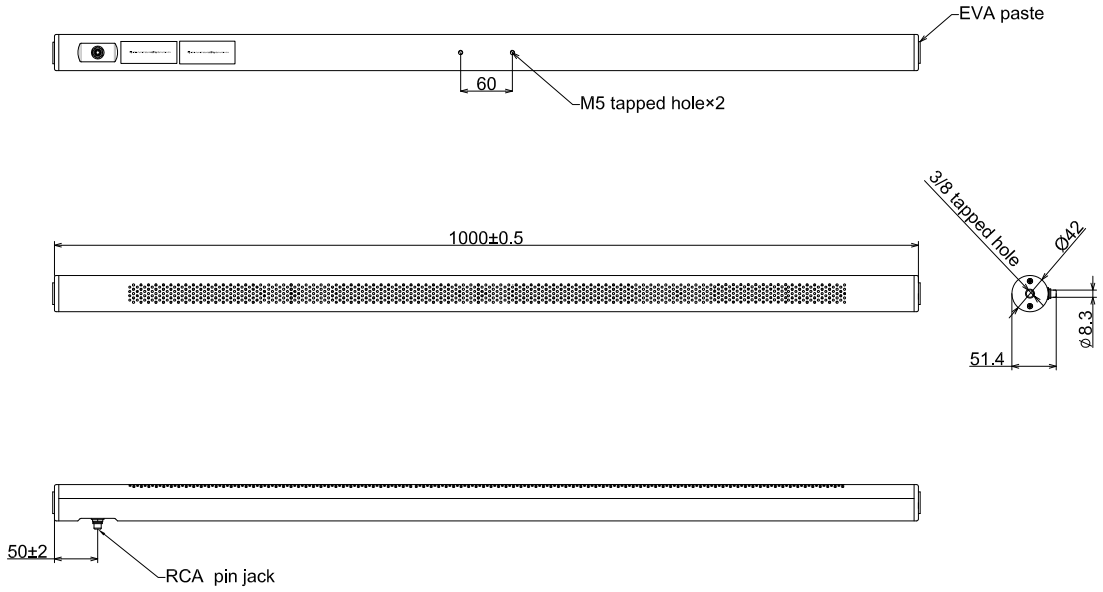

Specifications

Speaker unit	:	Full range single amp driven Linearray speaker units x4pcs connected
Impedance	:	8Ω
Frequency	:	190Hz - 7.5kHz ±3dB
SPL	:	81dB at 1m1w
Rated Input	:	40W constantly
Maximum Input	:	80W moment peak
Directional	:	Vertical 30 degrees, Horisontal 220degrees (4kHz-3dB)
Input connector	:	RCA pin jack
Cabinet	:	Aluminium cylindrical type cabinet
Hanging point1	:	3/8 nut plates (up,down both)
Hanging point2	:	M5 tapped hole at the center of back (60mm pitch)
Dimensions	:	1000×Φ42mm (except terminal)
Weight	:	1.4 kg
Color	:	Silver

※This specifications may change without notice.

No.	PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference	
DRAW. T.Yamaguchi		Checked by	Approved by - date	File name	Date 2016,11,09	Scale
FPS INC. 株式会社エフピーエス		Pipeline Slim speaker PLS-4WP			
		Outline drawing		Edition 02	Sheet